
# **The Bandit**

### Tesla Front License Plate Mount

## STEP 1

Orient the stainless steel rear brace horizontally and slide into the 2nd grill slot from the top. Repeat for the other side.

Note: The top collar stop (A) will prevent the stainless steel brace from coming loose and falling behind the grill.



## STEP 2

Align stainless steel rear brace vertically and insert bolt (lock washer first, then flat washer) through the bottom hole in the mount.

Hand-start the stainless steel bolt into the threaded stainless steel rear brace. Check for center alignment of mount, tighten 4 bolts using provided hex key, and secure mount until lock washer is flat. **Please do not over-torque!** 

Removal procedure: loosen and remove the bottom bolt first. Loosen the top bolt.



## STEP 3


Secure license plate (with or without license plate frame) to the mount using a Phillips screwdriver and the 4 x 3/8" screws provided.





# **The Bandit**

### Tesla Front License Plate Mount

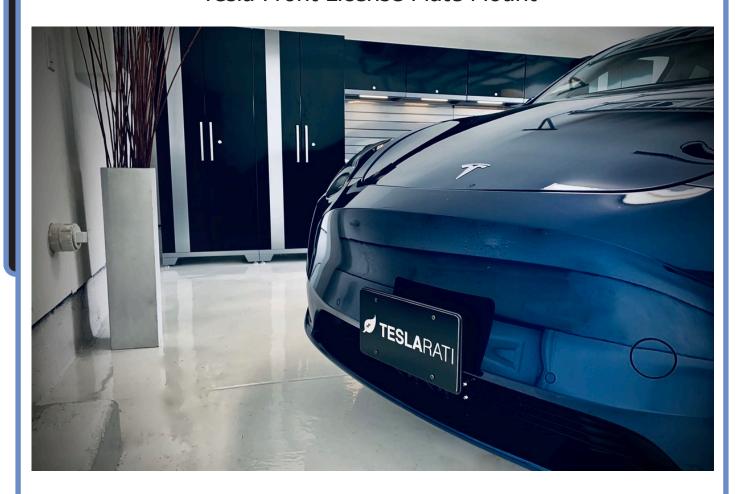

### **Limited Lifetime Warranty**

In the event that The Bandit fails due to defects in workmanship or materials, we will replace or repair any components that fail in normal use at our sole discretion. Edge variants and anomalies from CNC machining / manufacturing process are not defects. This warranty does not cover damages resulting from friction and or brushed car washes, negligence, abuse, misuse, theft, war, fire, vandalism, damage from over-torquing screws, or accidents occurring after installation.

Warranty applies exclusively to original owner. To request for a warranty claim, email shop@teslarati.com with the Order Number and description of claim. Upon approval, please securely pack product in original shipping box, and send, prepaid freight charges to:

1975 Creations c/o TESLARATI PO Box 295835 Sacramento, CA 95829

